

MULTI SPLIT

Multi Zone Hyper Heat Outdoor Unit

Model: LMUHB36DO



Item	Unit	Parameter
Model	—	LMUHB36DO
Performance		
Rated Cooling Capacity (Range)	Btu/h	36000(17900~42000)
Cooling Power Input	W	2650
EER	Btu/w	13.6
SEER	Btu/w	21.8
Rated Heating Capacity (Range)	Btu/h	36500(12500~49000)
Heating Power Input	W	2780
COP	W/W	3.85
HSPF4	Btu/w	11.0
Outdoor Ambient Temperature (Cooling/Heating)	°F	-22~122/ -22~86
	°C	-30~50/ -30~30
Electrical Data		
Normal Operational Voltage	V, Ph, Hz	208/230, 1, 60
Voltage Range	V	187-253
MCA	A	40
MOP	A	60
Outdoor Fan Motor		
Qty	—	2
Input	W	126.0
Speed	r/min	800/700/600
Refrigerant Pipe Data		
Design Pressure	PSIG	550/340
Refrigerant Type	Oz	R410A/162
Refrigerant Precharge	ft/m	98/30
Liquid Side/ Gas Side	inch	4 × 1/4"/3 × 3/8" + 1 × 1/2"
	mm	4 × Φ6.35/3 × Φ9.52 + 1 × Φ12.7
Max. Length for All Rooms	ft	262
Max. Length for One Indoor Unit	ft	115
Compressor		
Type	—	ROTARY
Capacity	Btu/h	38214.4
Input	W	3040
Refrigerant Oil/Oil Charge	ml	VG74/1400
Air Flow & Noise Level		
Outdoor Air Flow (Max.)	CFM	4500.00
Outdoor Noise Level	dB(A)	63
Dimension & Weight		
Dimension (W × D × H)	inch	37.48 × 16.34 × 52.48
	mm	952 × 415 × 1333
Packing(W × D × H)	inch	43.11 × 19.49 × 58.27
	mm	1095 × 495 × 1480
Net/Gross Weight	lbs.	223.11/253.97
	kg	101.2/115.2


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Outline and Physical Dimensions of LMUHB36DO

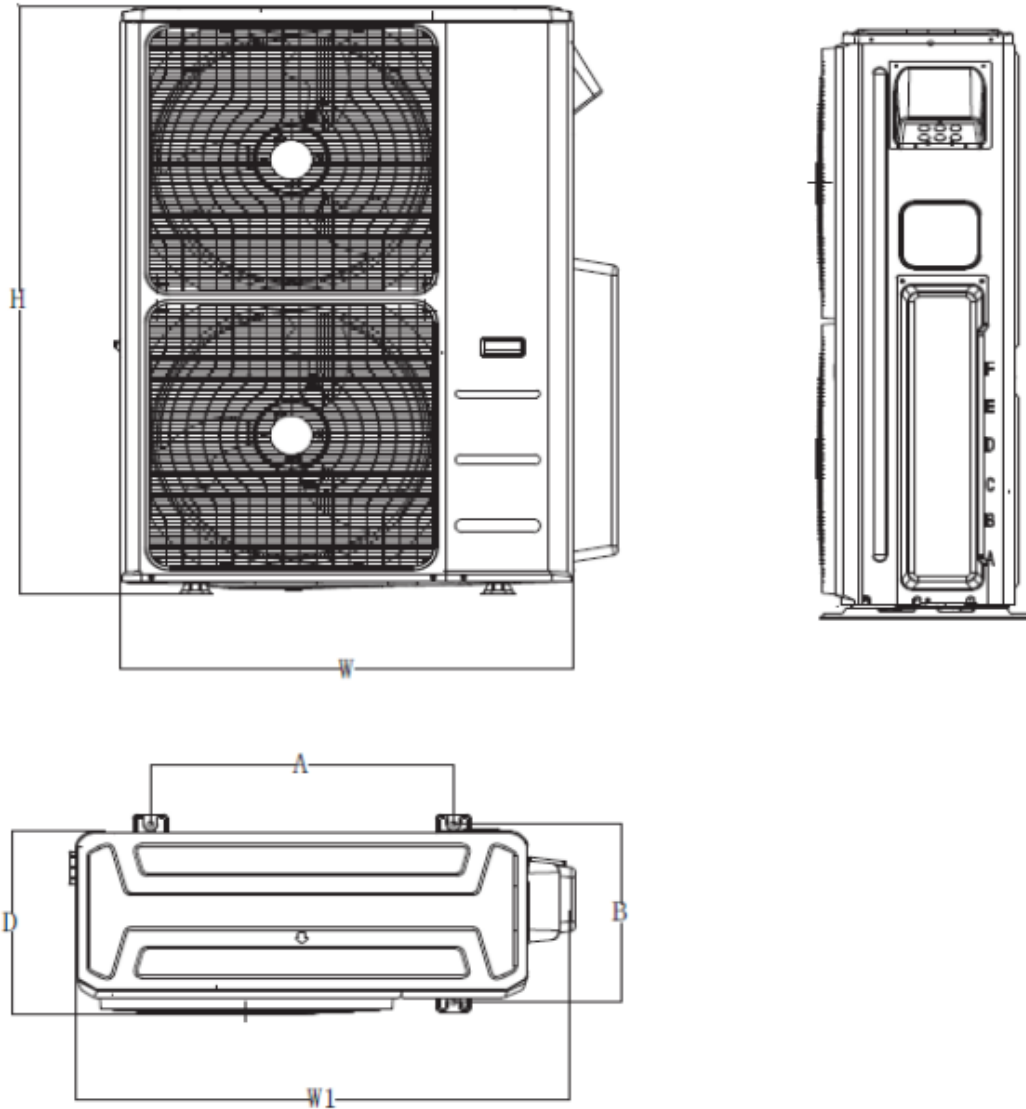

Model	W(mm/inch)	D(mm/inch)	H(mm/inch)	W1(mm/inch)	A(mm/inch)	B(mm/inch)
LMUHB36DO	952/37.5	415/16.3	1333/52.5	1060/41.7	634/25	404/15.9

