

## 208~230V Wall-Mounted Lomo






### Model:GMV-ND07G/B4B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND07G/B4B-T(U)
<b>Performance</b>		
Rated Cooling Capacity	kBtu/h	7.5
Rated Heating Capacity	kBtu/h	8.5
Sound Pressure Level	dB(A)	30/33/35
<b>Electrical Data</b>		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
<b>Fan</b>		
Type x Quantity	—	Cross-flow×1
Air Flow Volume	CFM	177/259/294
Fan Motor Running Current	A	0.07
Fan Motor Power Output	W	15
<b>Refrigerant Piping</b>		
Connection Pipe	Gas(mm/inch)	Φ9.52/Φ3/8
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
<b>Dimension/Weight</b>		
Dimensions (H×W×D)	mm/inch	289×845×209/ (11-3/8×33-1/4×8-1/4)
Net Weight	kg/lbs	10.5/23.5
<b>Other</b>		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

### Outline and Physical Dimensions of GMV-ND07G/B4B-T(U) .

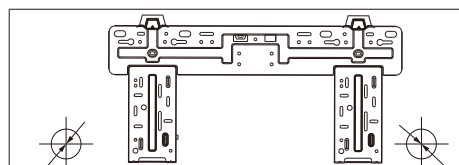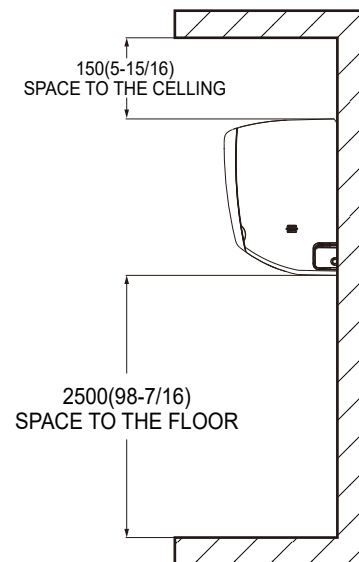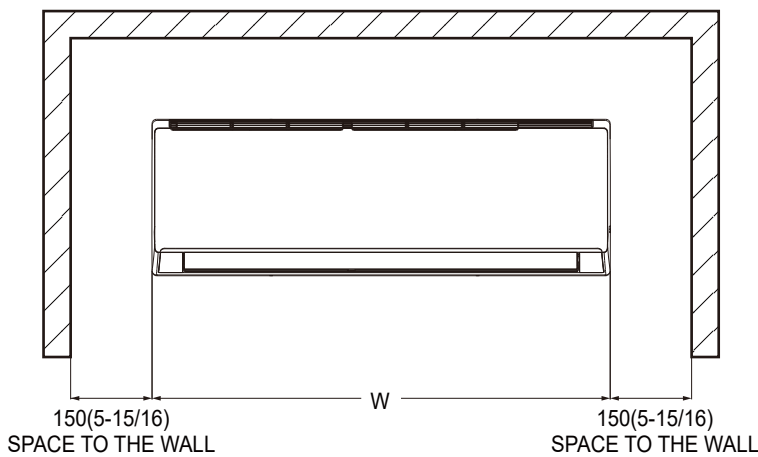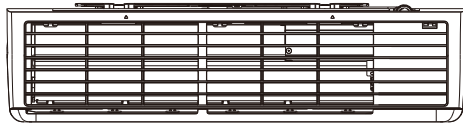

Left  $\Phi 55(2-3/16)$  or  $\Phi 70(2-3/4)$   
(Rear piping hole)

Right  $\Phi 55(2-3/16)$  or  $\Phi 70(2-3/4)$   
(Rear piping hole)

Model	Item	W	H	D
	GMV-ND07G/B4B-T(U)	845(33-1/4)	289(11-3/8)	209(8-1/4)

Unit:mm(in.)

