

## 208~230V 2-Way Cassette

### Model:GMV-ND09TS/A-T(U)




Specifications	Unit	Parameter
Model	—	GMV-ND09TS/A-T(U)
<b>Performance</b>		
Rated Cooling Capacity	kBtu/h	9.5
Rated Heating Capacity	kBtu/h	10.5
Sound Pressure Level	dB(A)	31/33/35
<b>Electrical Data</b>		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
<b>Fan</b>		
Type x Quantity	—	Centrifugal×3
Air Flow Volume	CFM	312/355/490
Fan Motor Running Current	A	0.6
Fan Motor Power Output	W	90
<b>Refrigerant Piping</b>		
Connection Pipe	Gas(mm/inch)	Φ9.52/Φ3/8
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
<b>Dimension/Weight</b>		
Dimensions (H×W×D)	mm/inch	315×1200×520 (12-3/8×47-1/4×20-1/2)
Net Weight	kg/lbs	43/95
<b>Other</b>		
Safety Certification	—	ETL


Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline and Physical Dimensions of GMV-ND09TS/A-T(U).

### Main Body

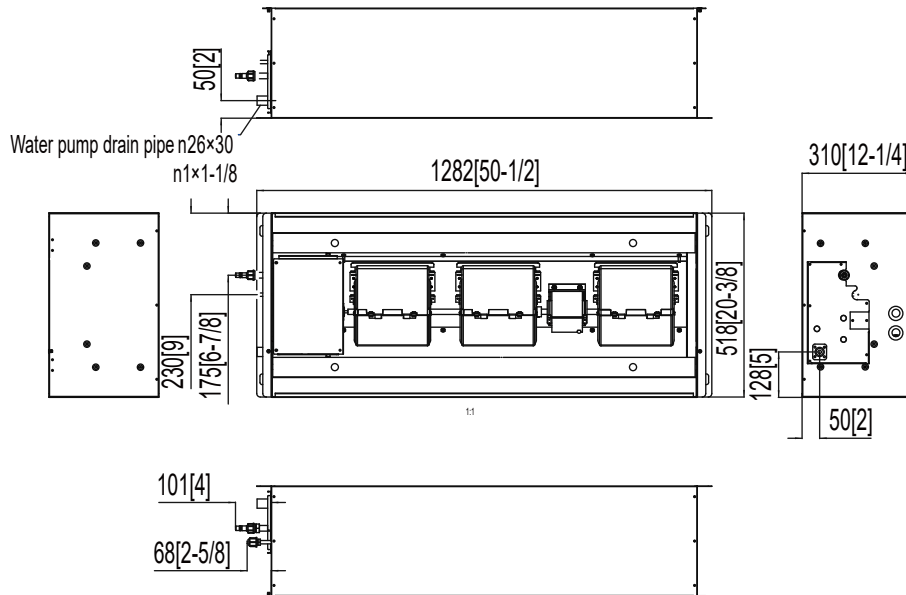

### TE01 panel

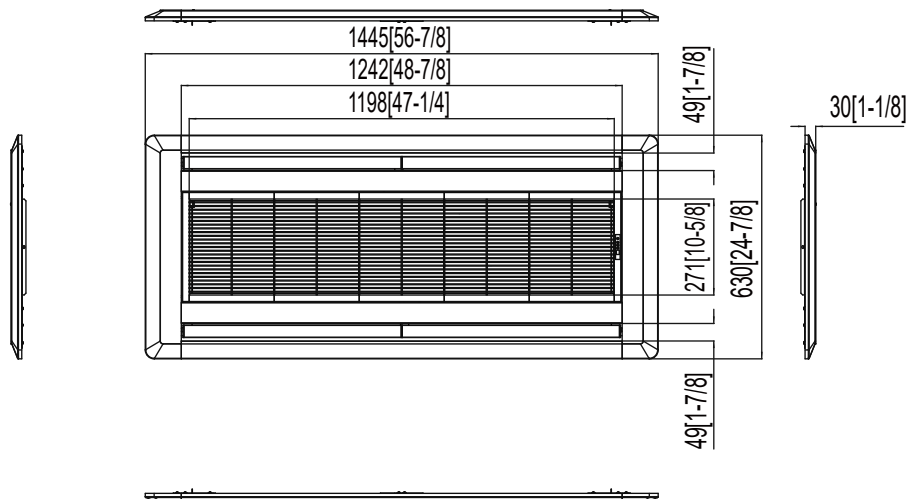

Unit:mm(in.)

