


UL 16AWG, 2Conductor Wire, SHIELD

Models: LBW2C16S

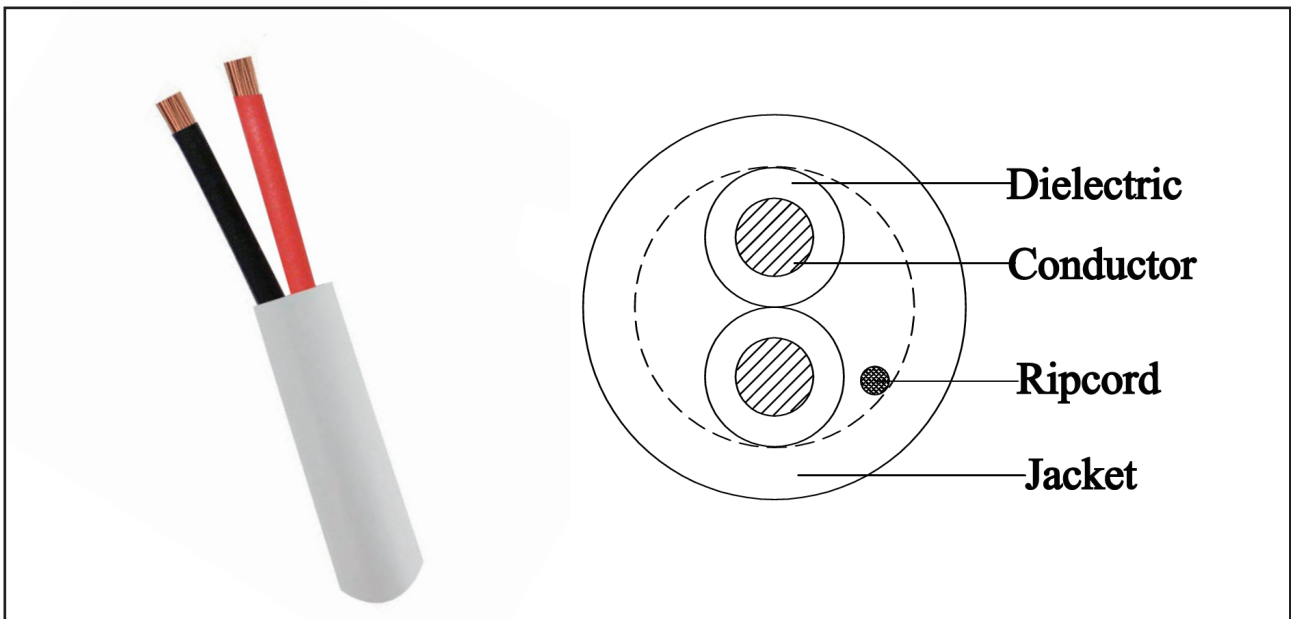

General Description

- UL Listed.
- Conductor: 16AWG stranded bare copper, 19x0.11"
- Dielectric: PL-PVC, Dia=0.077"±0.004"
- Dielectric color code: 1.Black 2.Red
- Ripcord: Nylon
- Jacket: PL-PVC
 - Jacket color: White
 - Jacket Dia=0.189"±0.006"
 - Nominal Jacket Thickness= 0.015"
- Shield:
 - AL-Mylar Foil
 - 100% Coverage with 20% overlapping
- Electrical Properties:
 - Operating Temp: -68°F~+167°F
 - Operating Volt: 300V
 - Conductor DCR: 4.18 Ohms/1000Ft