

## MULTI SPLIT

## MULTI ZONE CASSETTE INDOOR UNIT

Model: LMHB24DSI



Item	Unit	Parameter
<b>Model</b>	—	<b>LMHB24DSI</b>
<b>Performance</b>		
Rated Cooling Capacity (Range)	Btu/h	24000(8000~25000)
EER	Btu/w	11
SEER	Btu/w	20.2
Rated Heating Capacity (Range)	Btu/h	25000(111840~27000)
COP	W/W	3.5
HSPF4	Btu/w	11.6
<b>Electrical Data</b>		
Normal Operational Voltage	V, Ph, Hz	208/230, 1, 60
Voltage Range	V	187-253
MCA	A	2.5
MOP	A	15
<b>Indoor fan motor</b>		
Type	—	Cross-Flow
Model	—	ZKFN-45-8-1
Qty	—	1
Input	W	72
Speed(Hi/Mi/Lo)	r/min	680/624/568/512
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Med/Lo) (No duct)	CFM	1200/1080/930
Indoor noise level (Hi/Med/Lo)	dB(A)	48/45.5/43
<b>Dimension &amp; Weight</b>		
Dimension (W×D×H)	inch	32.68×32.68×8.07
	mm	830×830×205
Packing(W×D×H)	inch	35.83×35.83×9.84
	mm	910×910×250
Net/Gross weight	lbs.	47.18/55.34
	kg	21.4/25.1
<b>Others</b>		
Liquid side/ Gas side	inch	3/8" / 5/8"
	mm	9.52/15.9
Application area	sq.ft	344.44 ~ 505.90
	m2	32 ~ 47


**Job Name:**

**Schedule Reference:**

**Date:**

Specification are subject to change without notice.

## Outline and Physical Dimensions of LMHB24DSI

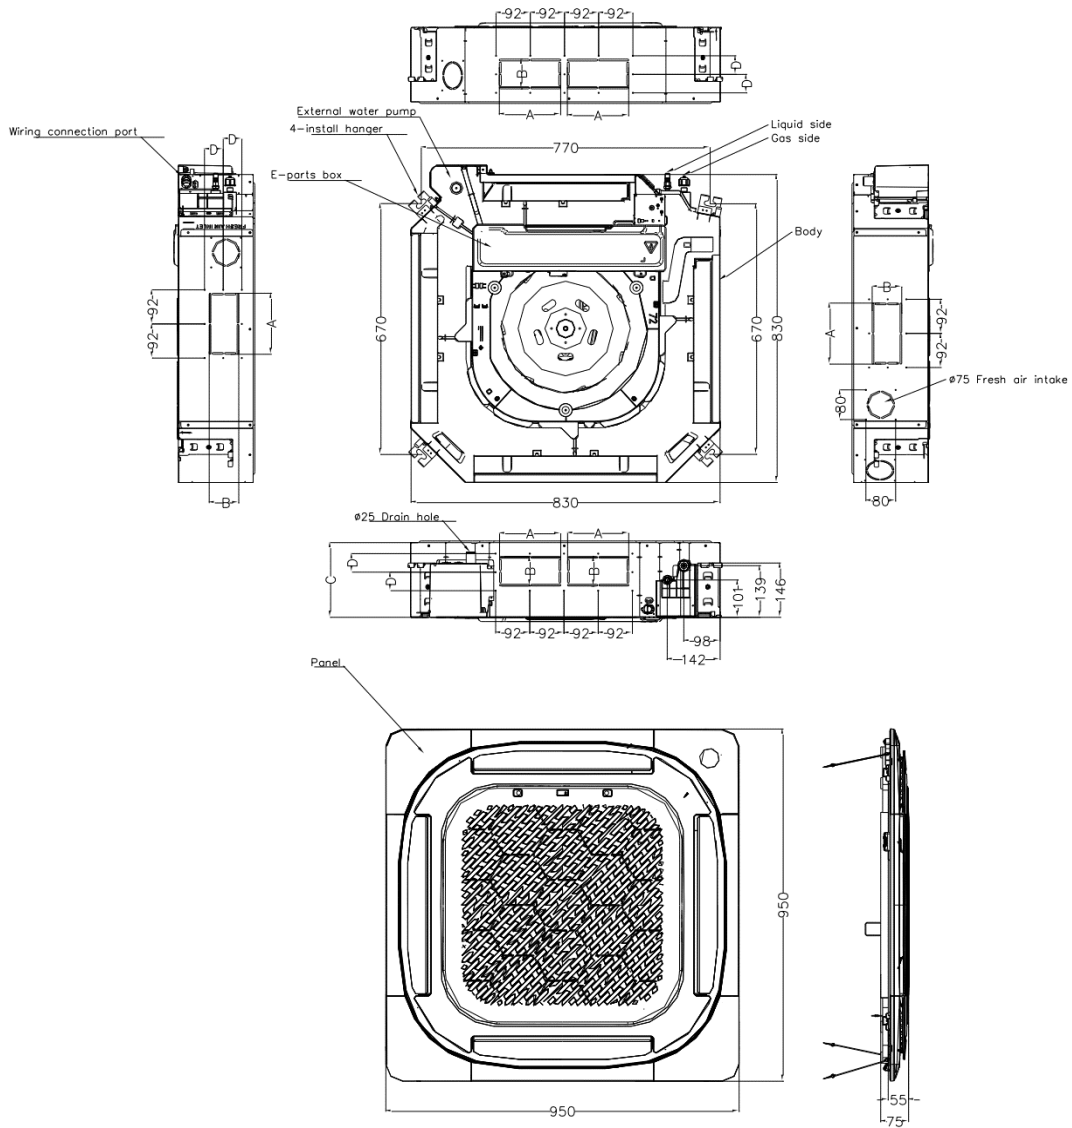

Model	A(mm/inch)	B(mm/inch)	C(mm/inch)	D(mm/inch)
LMHB24DSI	165/6.5	80/3.15	205/8.07	50/1.97

