

LBG Products®

HVAC expert, provide comfort life at home

MULTI SPLIT

MULTI ZONE WALL MOUNTED INDOOR UNIT

Model: LBH30DTI



Item	Unit	Parameter
Model	—	LBH30DTI
Performance		
Rated Cooling Capacity (Range)	Btu/h	30000(7200~31600)
EER	Btu/w	10.5
SEER	Btu/w	18.6
Rated Heating Capacity (Range)	Btu/h	30000(10600~32500)
COP	W/W	2.71
HSPF4	Btu/w	9.5
Electrical Data		
Normal Operational Voltage	V, Ph, Hz	208/230, 1, 60
Voltage Range	V	187-253
MCA	A	
MOP	A	
Indoor fan motor		
Type	—	Cross-Flow
Model	—	ZKFP-58-8-1-5
Qty	—	1
Speed(Hi/Mi/Lo)	r/min	1200/1050/950
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	CFM	1350/1050/800
Indoor noise level (Hi/Med/Lo)	dB(A)	51.5/47.5/44
Dimension & Weight		
Dimension (W×D×H)	inch	49.57×11.10×14.25
	mm	1259×282×362
Packing(W×D×H)	inch	52.76×17.72×15.16
	mm	1340×450×385
Net/Gross weight	lbs.	37.48/50.49
	kg	17/22.9
Others		
Liquid side/ Gas side	inch	3/8" / 5/8"
	mm	Φ9.52 / Φ15.9
Application area	sq.ft	430.56 ~ 635.07
	m2	40 ~ 59


Job Name:

Schedule Reference:

Date:

Specification are subject to change without notice.

Outline and Physical Dimensions of LBH30DTI

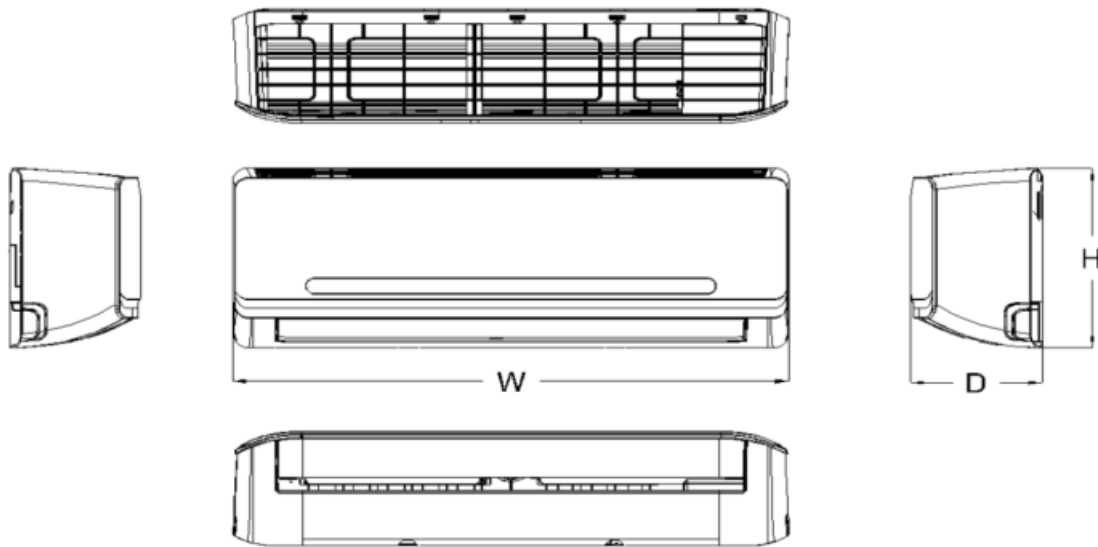

Model	W(mm/inch)	D(mm/inch)	H(mm/inch)
LBH30DTI	1259/49.57	282/11.10	362/14.25

The Installation of the Rear Panel

